

臻藏时光

老木头产品

Recycle old wood
products

Updated date
2023



产品分类

Product
categories

01

天花、梁、柱

Ceiling, beam, column

02

墙板

Wallboard

03

地板

The floor

04

家具

Furniture

05

房门

The door

材料来源

我们原料主要来自，华东，华北，西南区域的100%的回收材料 拆自私宅，工厂，庙宇，仓库等场所 木头种类分为，松木，榆木，杉木，橡木，铁杉等，在原用途中，常用于户外墙板、园林等，长期受日晒雨淋，形成的表面自然长期氧化，形成的自然灰色质感的木板，同时原用途中，原本表面是带有油漆或彩色涂层的，则形成更加斑驳、随机的风化面，其形成的颜色和视觉效果，是任何人为颜色修饰无法达到的效果

Material source

Our raw materials are mainly from East China, North China and southwest China. 100% recycled materials are dismantled from private homes, factories, temples, warehouses and other places. Wood can be divided into pine, elm, fir, oak, hemlock, etc. In the original use, it is often used for outdoor wall panels and gardens. In the original use, the original surface is coated with paint or color coating, forming a more mottled and random weathered surface. The color and visual effect formed by it are the effects that cannot be achieved by any artificial color modification



加工过程

材料经粗选，精选，把最合适的部分摘取出来，通过现代的设计，结合材料特点将回收的木料加工成地板，墙板以及家具



Machining process

After rough selection and selection of materials, the most suitable parts are picked out, and the recycled wood is processed into flooring, wall panels and furniture through modern design combined with the characteristics of materials



常规尺寸

产品尺寸说明，回收木材尺寸随机，宽度范围50-200mm，会有一定比例的混搭（宽板窄板数量配比适中），600mm以下属于短板，短板比例控制在30%以内。

Regular size

Product size description: The size of recycled wood is random, the width range is 50-200mm, there will be a certain ratio of mixing (the number of wide and narrow boards is moderate), 600mm or less belongs to the short board, the proportion of short boards should be controlled within 30%.

A、老榆木

尺寸：500-2000mm长
60-200mm宽
5-25mm厚



B、谷仓板

尺寸：500-3000mm长
60-150mm宽
5-20mm厚



C、老铁杉

尺寸：500-3000mm长
100-200mm宽
15-20mm厚



—— 常规尺寸 ——

产品尺寸说明，回收木材尺寸随机，宽度范围50-200mm，会有一些比列的混搭（宽板窄板数量配比适中），600mm以下属于短板，短板比例控制在30%以内。

—— Regular size ——

Product size description: The size of recycled wood is random, the width range is 50-200mm, there will be a certain ratio of mixing (the number of wide and narrow boards is moderate), 600mm or less belongs to the short board, the proportion of short boards should be controlled within 30%.

D、老橡木

尺寸：500-2000mm长
50-120mm宽
5-20mm厚



E、老杉木

尺寸：500-3000mm长
60-150mm宽
5-20mm厚



F、老柚木

尺寸：890mm长
85mm宽
17mm厚





木柱方梁

老方梁常见种类分为：老松木，老榆木，老楠木，老栗木，老杉木

侘寂风老木梁特点：表面颜色不发黄，表面有锯齿纹，表面有凿痕，表面保留老木梁使用过程中的 斧凿痕迹，木材拉丝肌理感不强。

新料做旧方式：

- 1、使用油锯在木头表面做倾斜锯齿，气磨打磨部分表面做旧晾晒。
- 2、老木料清水冲洗，百洁布打磨干净。新木头锯出方料，表面用刨斧辟出痕，表面刷做旧剂进行晾晒。





地板墙板


老木板常见墙板种类分为：老松木，老榆木，老楠木，老栗木，老杉木，老桐木，老杨木


侘寂风墙板特点：自然旧面，老木头常年烟熏，表面有斜纹锯齿，只做表面清理不进行过多修色，表面带有早期制作过程中的斧凿锯切的痕迹。木纹细腻无大山纹。

新料做旧方式：选非洲材比如玫瑰木、非洲檀，一些木质偏硬无木纹的木料表面用油锯，卧式带锯。或者刨刀人为在表面做出一些锯齿和刨刀的痕迹，深色木头再通过漂白，日晒，做旧剂三种工艺快速氧化木料。氧化好的木料表面再用老的机油油泥在木料上进行涂抹渍色。生产加工时把做旧好的木料进行打磨清理。目的是清理掉表面的油渍和灰土。


模仿老木料的两种方式一种是漂白，主要是针对一些深色木头的做旧方式，模拟深色木头做旧过程先进行漂白退去木材的深色色素，在通过日照雨林使木材出现天然开裂之后在进行做旧剂加速木材氧化。第二种是通过人为制造使用痕迹，比如锯凿火烧等痕迹，模拟木材使用过程中人为带来的痕迹。



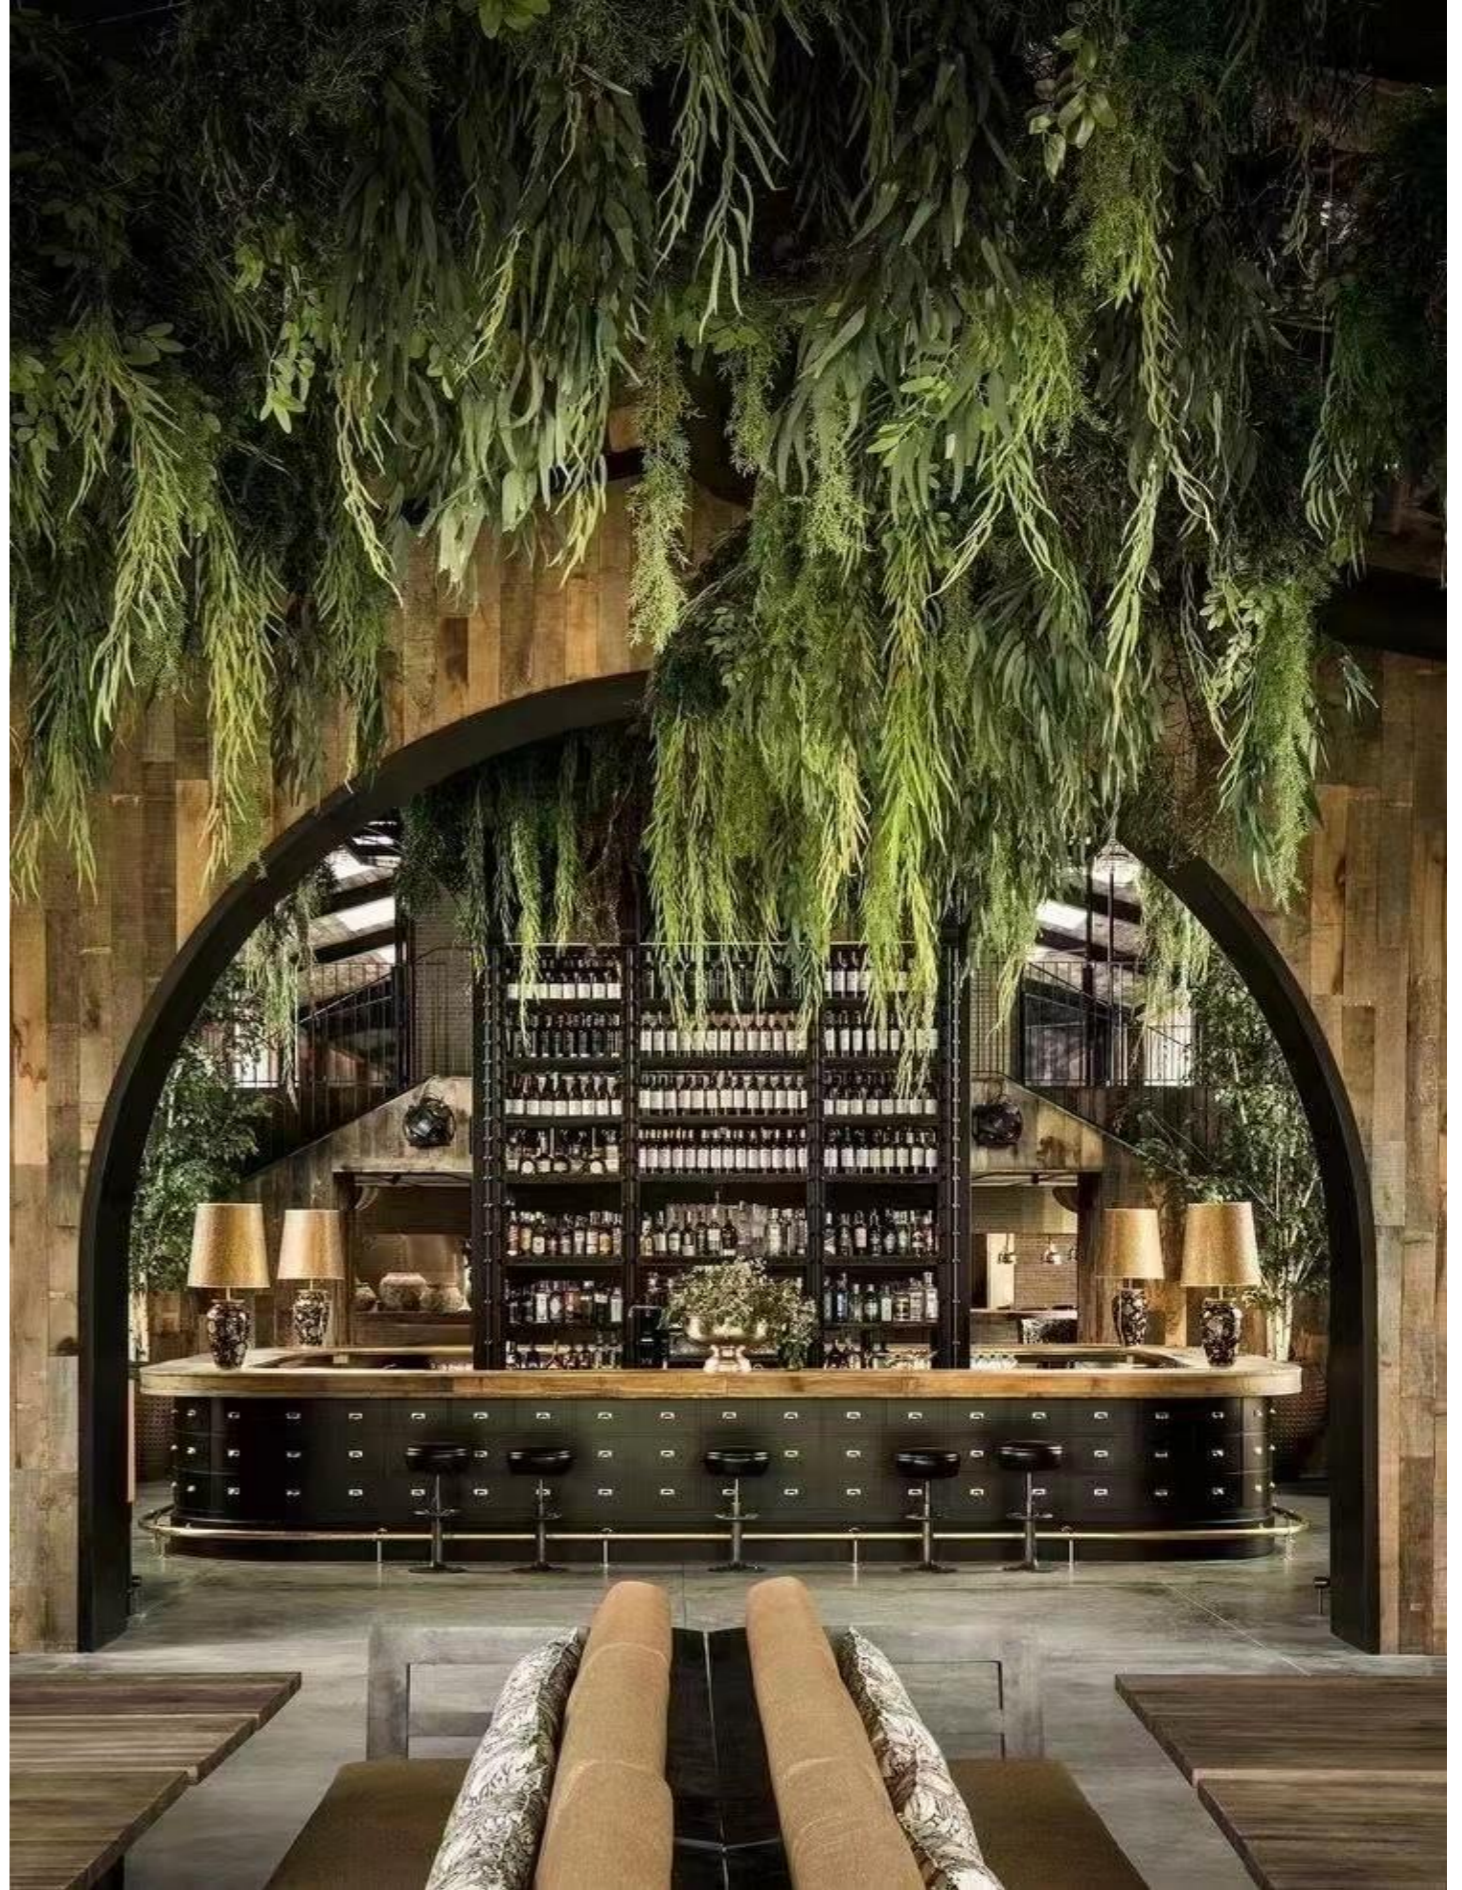

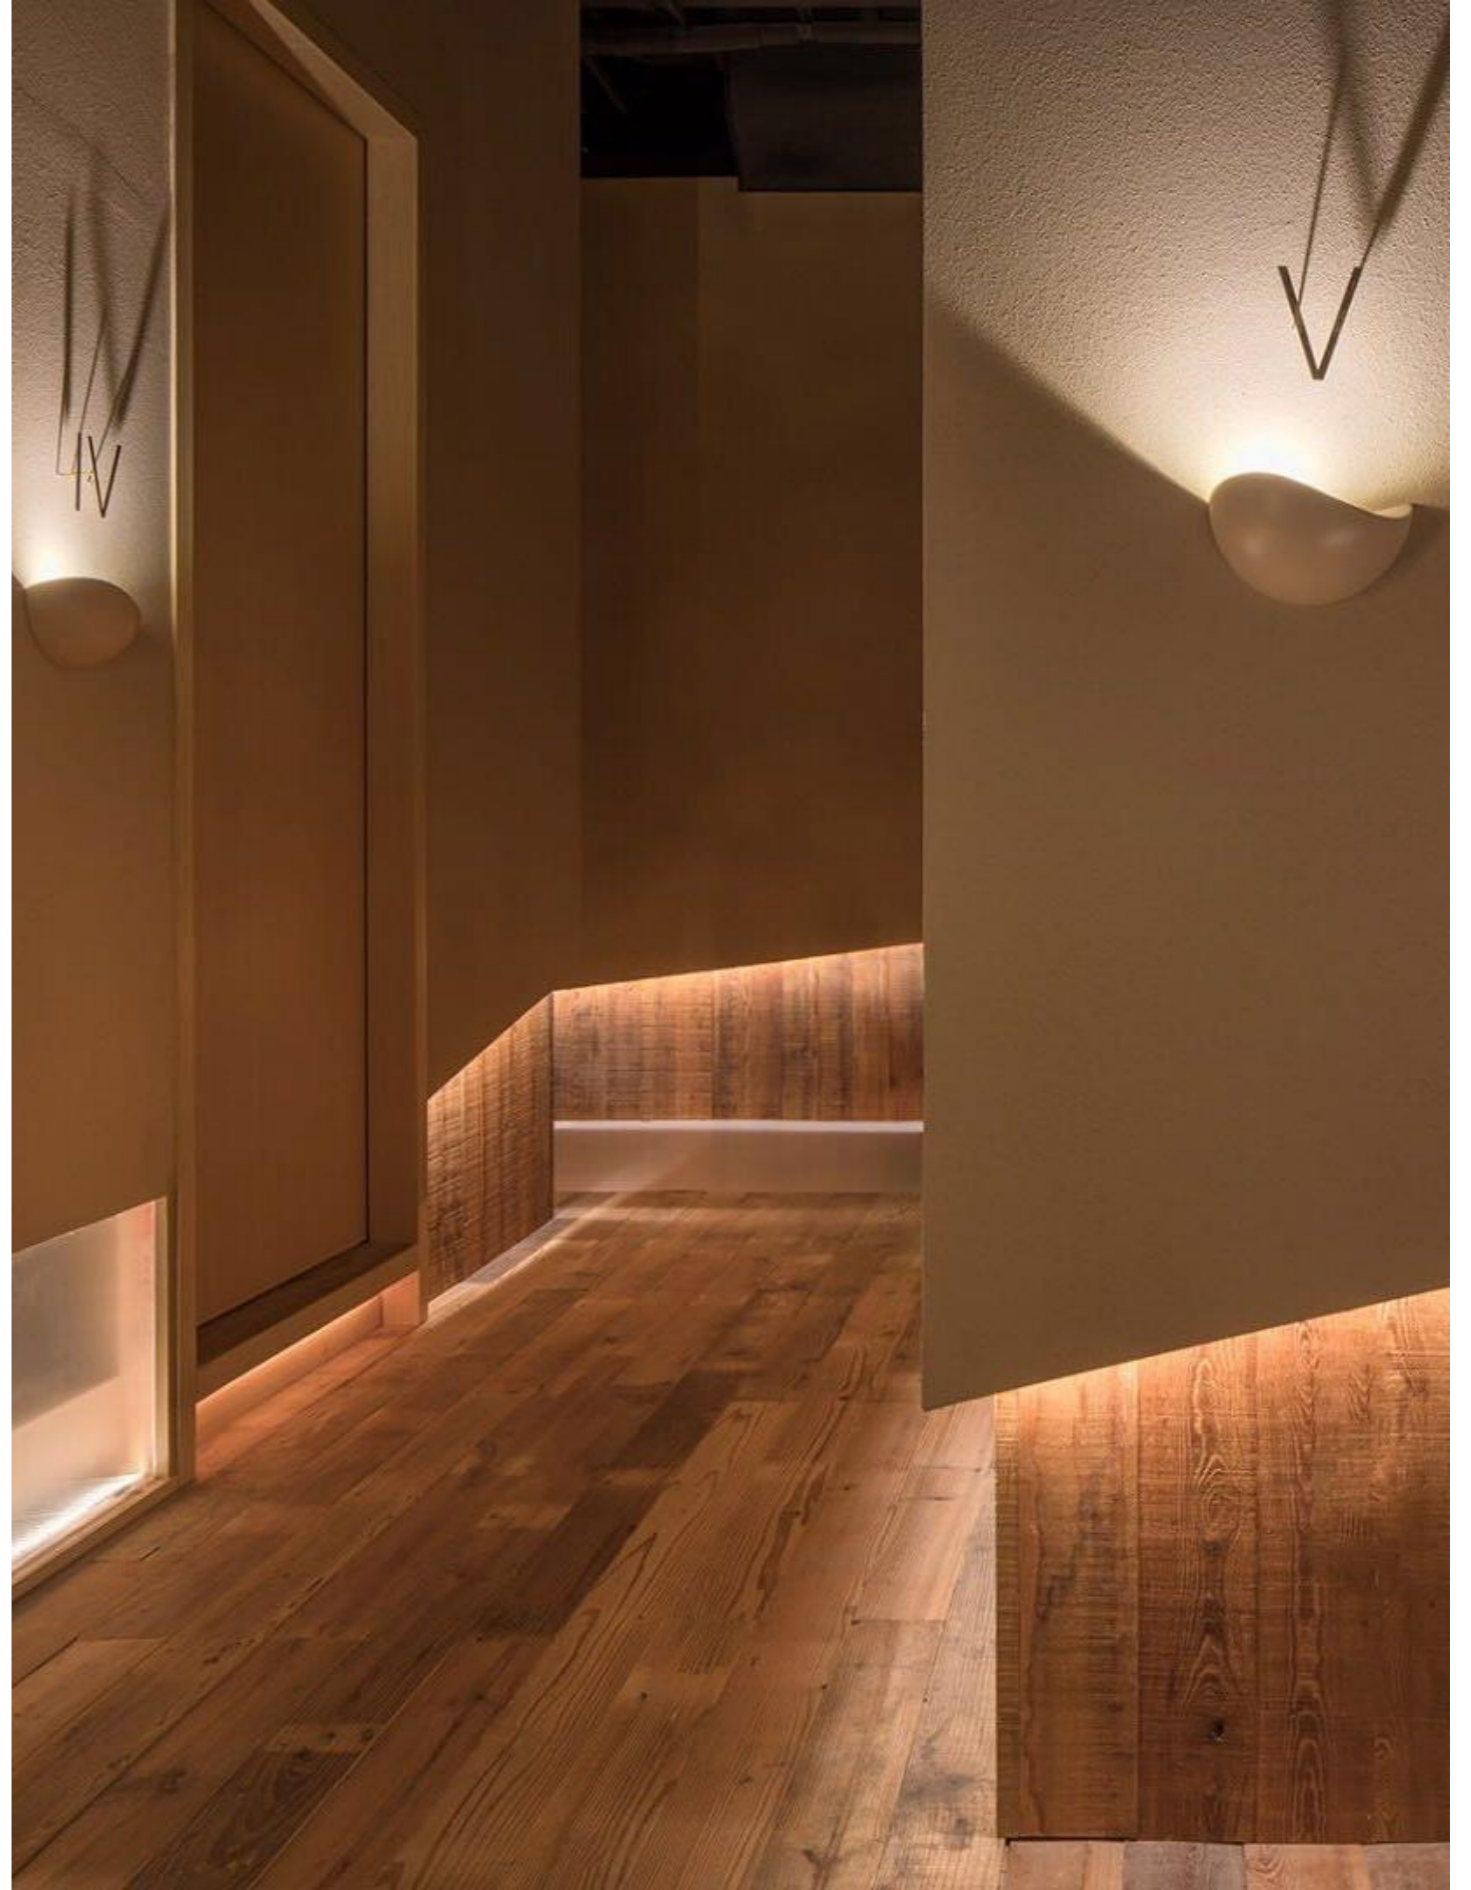



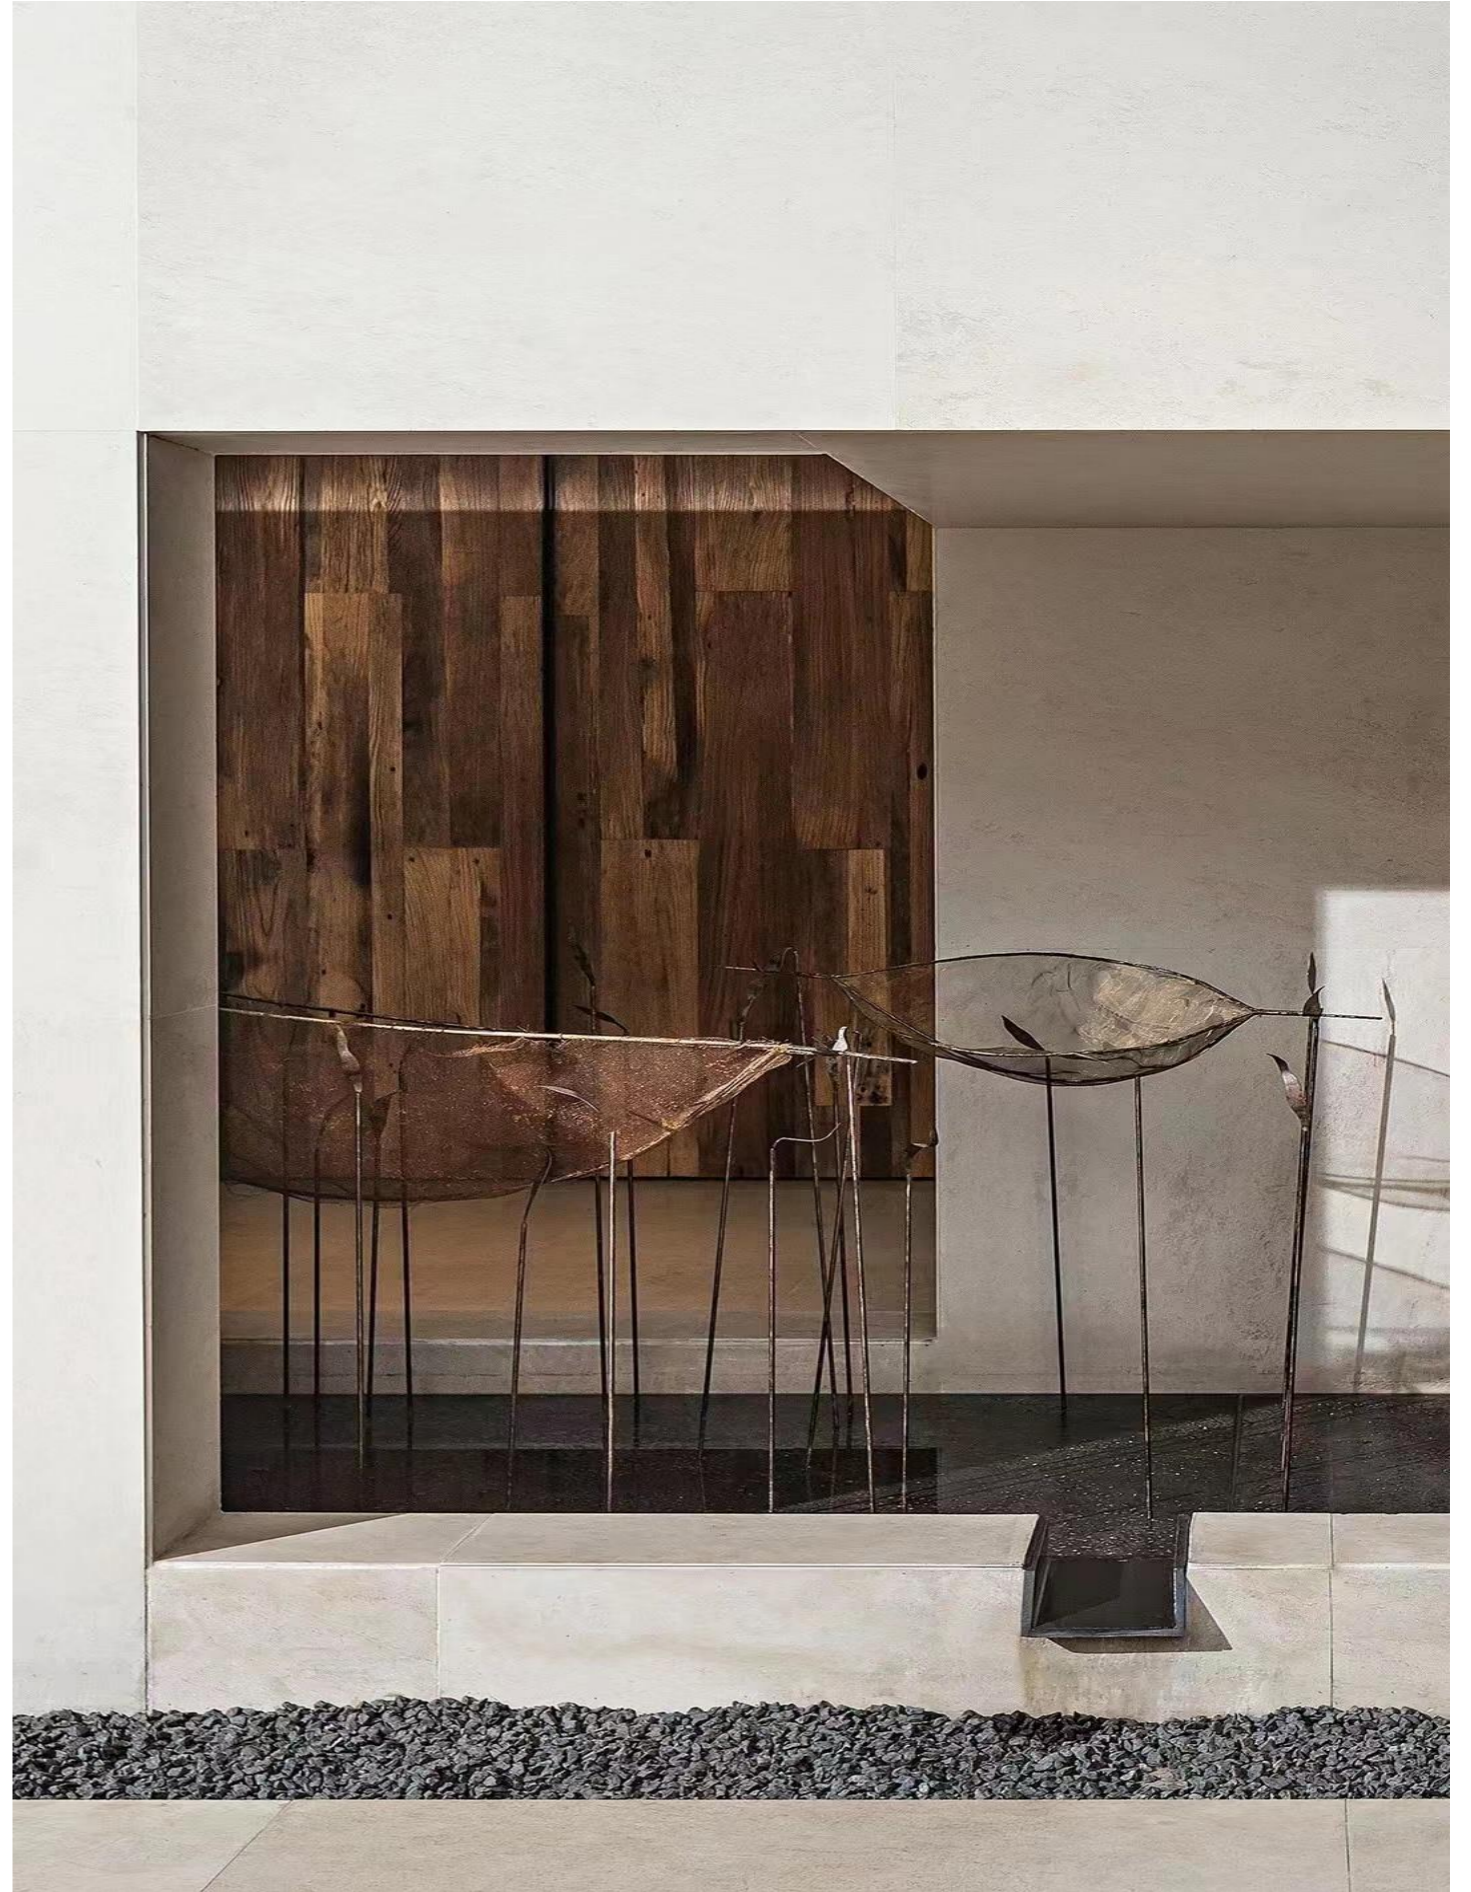












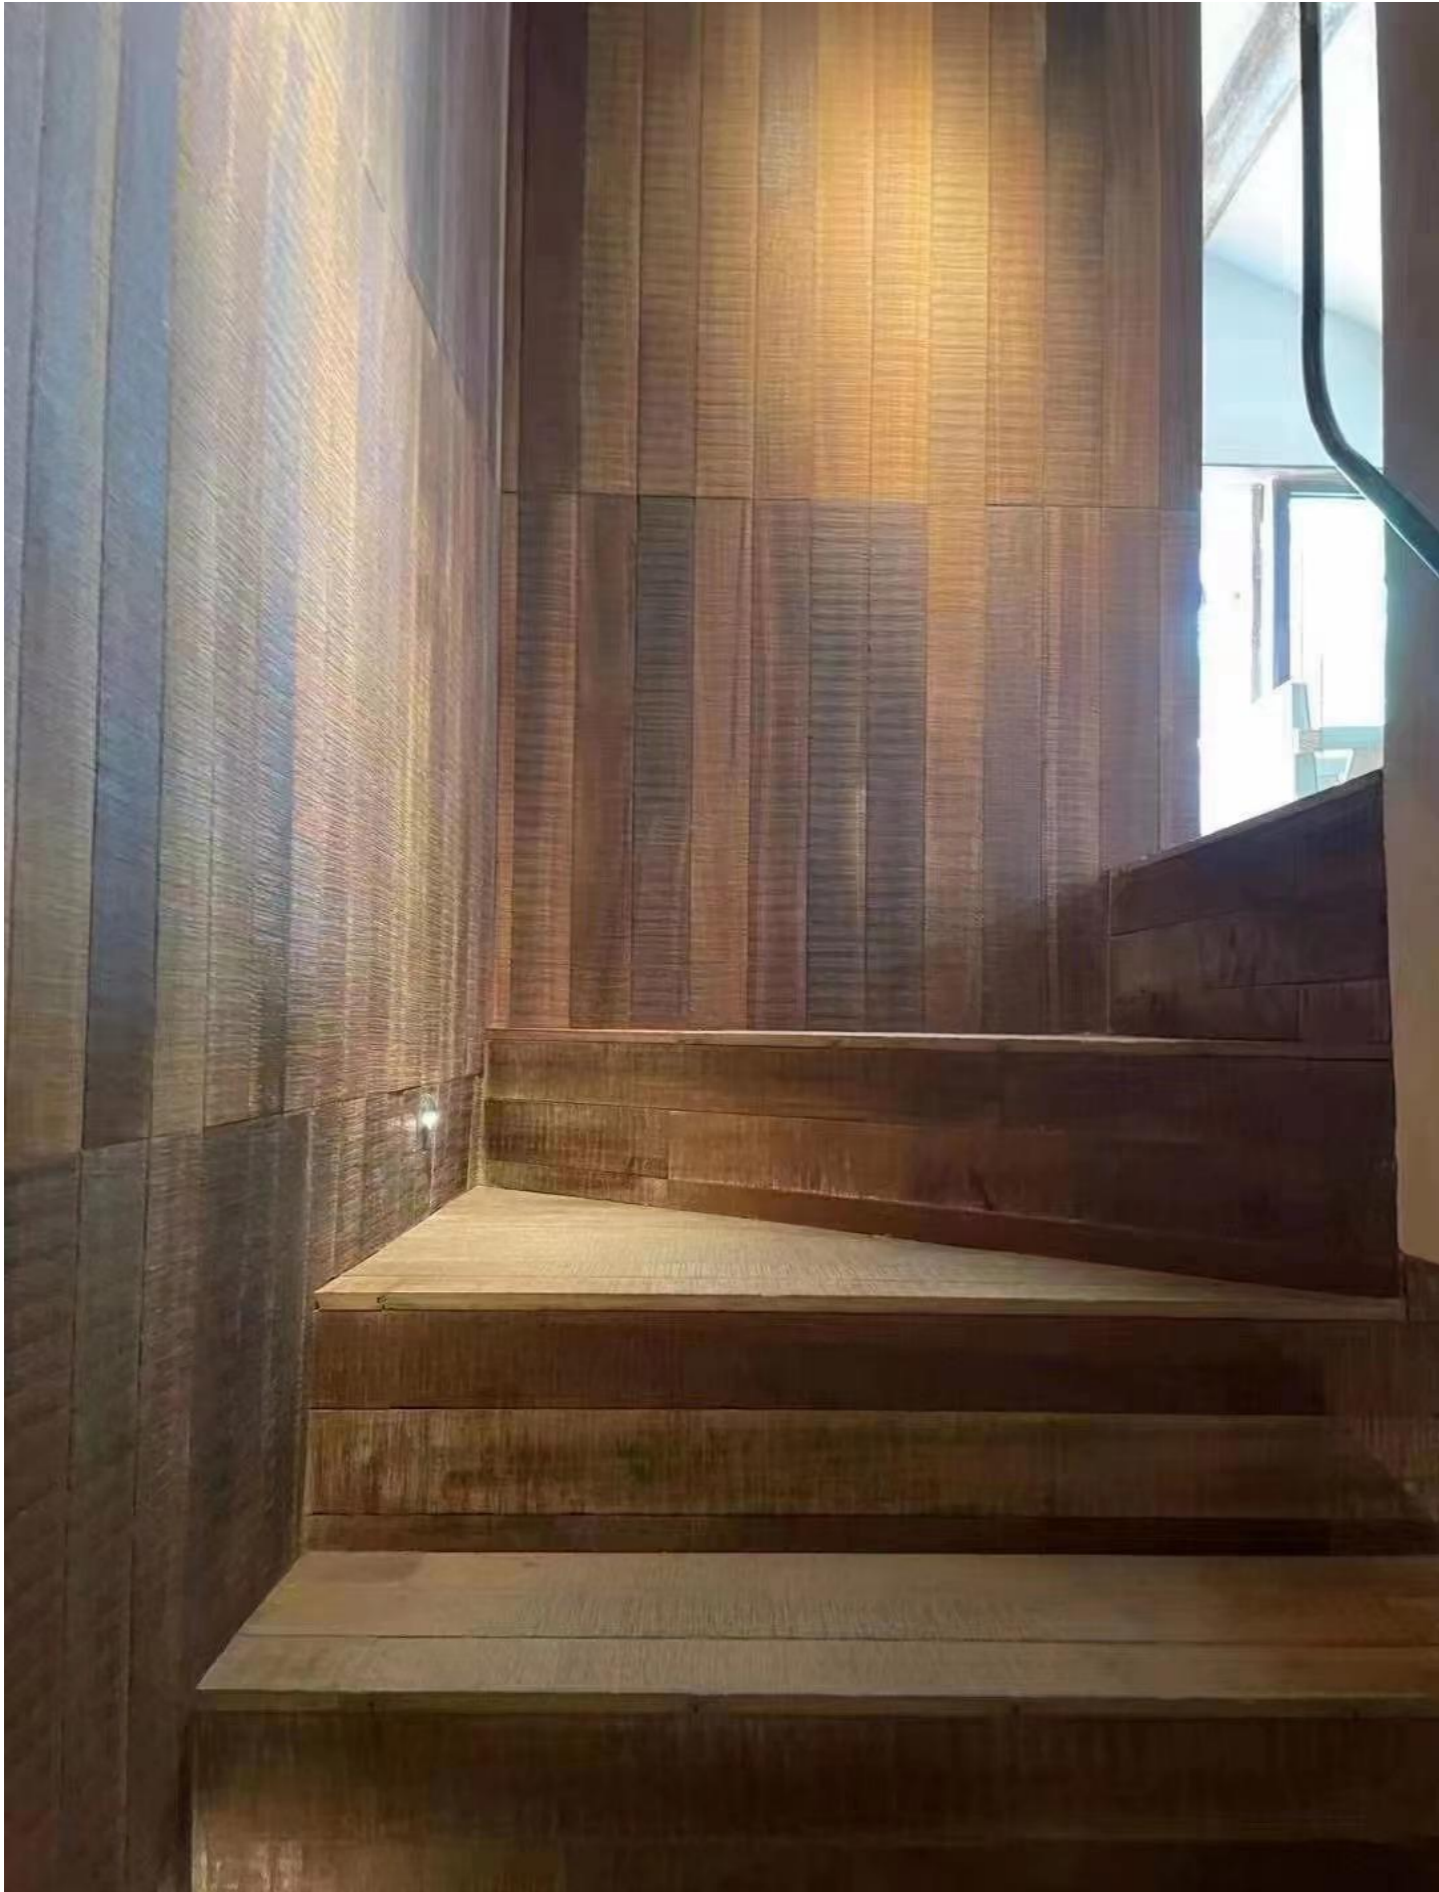





餐桌 吧台 柜子 餐椅

侘寂风餐桌吧台常见木种：老榆木，老楠木，老栗木，老橡木，老杉木，核桃木

侘寂风餐桌吧台特点：餐桌台面特点桌面要旧而净，桌腿款式多以大师中岛乔治家具款式，中古家具款式为主。桌面以老木头，硬木料简单拼板制作。多以正方形，矩形，圆形为主。表面保留原始使用痕迹拼板桌只修复拼板出现的高低差，自然旧面，老木头常年烟熏，表面浅灰色，表面有斜纹锯齿，加工只做表面清理不进行过多修色。带有早期制作过程中的斧凿锯切的痕迹。木纹细腻无大山纹，侘寂风柜类主要以凸显木质，体现功能为主。

新料做旧方式：选非洲材比如玫瑰木，非洲檀，一些木质偏硬无木纹的木料表面用油锯，卧式带锯。或者刨刀人为在表面做出一些锯齿和刨刀的痕迹，深色木头再通过漂白，日晒，做旧剂三种工艺快速氧化木料。氧化好的木料表面再用老的机油油泥在木料上进行涂抹渍色。生产加工时把做旧好的木料进行打磨清理。目的是清理掉表面的油渍和灰土。

模仿老木料的两种方式一种是漂白，主要是针对一些深色木头的做旧方式，模拟深色木头做旧过程先进行漂白退去木材的深色色素，在通过日照雨林使木材出现天然开裂之后在进行做旧剂加速木材氧化。第二种是通过人为制造使用痕迹，比如锯凿火烧等痕迹，模拟木材使用过程中人为带来的痕迹。

柜子类 侘寂风柜子常见墙板种类分为：老松木，老榆木，老楠木，老栗木，侘寂风柜子特点：自然旧面，老木头常年烟熏，表面浅灰色，表面有斜纹锯齿，加工只做表面清理不进行过多修色。







老榆木天然色差



1号



2号



3号



4号



5号



6号

老橡木天然色差



1号



2号



3号



4号



5号



6号

谷仓板天然色差



1号



2号



3号



4号



5号



6号

老杉木天然色差



1号



2号



3号



4号



5号



6号

老铁杉天然色差



1号



2号



3号



4号



5号



6号


铁柚木天然色差



1号



2号

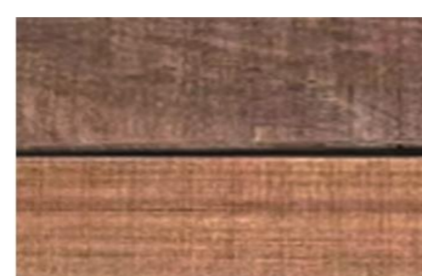

3号



4号



5号



6号

注意事项

1、材料描述

由于材料为回收望板、墙板或门，表面会有一些局部开裂、孔洞、自然风化，孔洞直径大于20mm使用与面板颜色接近的木块修补或不建议使用，修补比列不得超过总量10%，孔洞大于5mm小于20mm的，可以接受，但数量不得超过50%，贯穿式开裂不能使用，局部开裂不超过长度50%可以使用但数量不能超过20%

以上图片仅供参考，具体以实际生产情况为准，建议客户来工厂验收或提供大货图片参考

回收木材的规格尺寸及表面效果会跟材料发生一定的变化，如有较大变化时，臻藏会通知客户及时沟通以达成一致避免误解

2、安装指南

地板侧边开公母榫，或双面母槽配合生口条

地板安装，基础地面：1 水泥地面找平，防潮处理,清洁无污染；2 地面满铺基层板； 固定方式：采用地板钉，从地板的公榫位置入钉，把单块地板固定在基层板上；根据需要，在母榫里面，涂抹适量地板胶，密拼安装缝；也可以地面找平后用Sika地板胶铺装

3墙板，墙面满铺基层板，然后在基层板上以胶钉结合的方式安装

3、保养方法

日常清洁，用吸尘器将地板表面灰尘清理干净，然后用拖布清洁，难清洁的轻微污渍用清洁剂清洁去除即可

Matters needing attention

1. Material description

Due to material for recycling sheathing, wall or door, there will be some local surface cracks, holes, natural weathering, the hole diameter is greater than 20 mm use and close to the color of wood panel, repair or not recommended to repair than column must not exceed 10%, less than 20 mm hole is greater than 5 mm, can accept, but amount shall not exceed 50%, through type cracking can't be used, Partial cracking not more than 50% of length can be used but not more than 20% of quantity

The above pictures are for reference only, and the actual production situation shall prevail. It is recommended that customers come to the factory for acceptance or provide pictures of bulk goods for reference

The size and surface effect of the recycled wood will change with the material to some extent. If there is a big change, Zhenzang will inform the customer to communicate in time to reach a consensus and avoid misunderstanding

2. Installation guide

Floor side open male and female tenon, or double sided female groove with raw mouth

Floor installation, foundation ground: 1 cement floor leveling, moisture-proof treatment, clean and pollution-free; 2 the ground is covered with base plate; Fixed method: the use of floor nails, from the floor of the tenon position into the nail, the single floor fixed on the base board; According to the need, in the mother tenon inside, daub an appropriate amount of floor glue, close joint installation seam; It can also be paved with Sika floor glue after leveling the ground3 wall panel, wall covered with base plate, and then in the base plate in the way of adhesive nail installation

3, Maintenance methods

For daily cleaning, clean the dust on the floor surface with a vacuum cleaner, and then clean it with a mop, and remove the slight stains that are difficult to clean with a cleaner

商业空间回收老木头产品定制服务商